


Required access to assets

Protection of surface fittings

You must ensure a one metre clearance around a water or sewer surface fitting when arranging pot plants, landscaping, constructing a fence, retaining wall or permanent structure. The surface fitting must be accessible by Icon Water at all times, day and night.



Water meter



Above ground hydrant



In ground valve or hydrant




Sewer maintenance hole



Sewer riser or inspection shaft

Changing ground levels

If you cut and fill the land you must ensure the change to ground levels does not result in stormwater run-off or ponding around surface fittings.

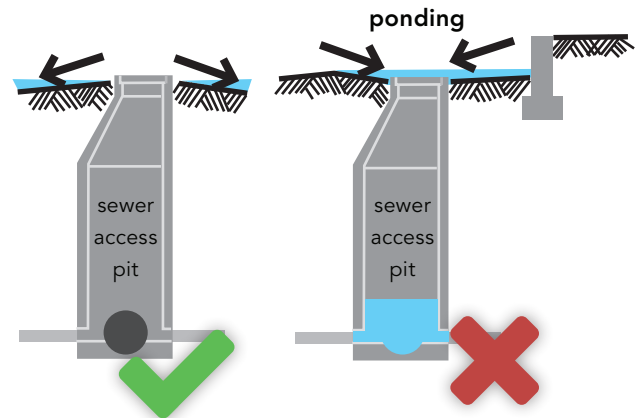

Protection of surface fittings in driveways and paving

If you have a surface fitting such as a sewer manhole, water meter box, valve or in-ground hydrant within your driveway or paving you must ensure the fitting is flush with the surface of the pavement and accessible to Icon Water at all times. Please note, services in trafficable areas require adequate protection, gatic covers are generally required, please contact Icon Water for more information on 6248 3111.

